



2500 South Meridian • Oklahoma City, OK 73108-1744
 Office: 405-681-6691 • Toll Free: 800-965-7677 • Fax: 405-681-6693

DISTRIBUTORS OF **BLUE BIRD** SCHOOL BUSES

Corporate Office

Ryan Ross, General Manager

Oklahoma Bus Sales

Todd Miller, Sales Representative

BID TO: Mid-America Tech. Center
ADDRESS: PO Box H
CITY/STATE/ZIP: Wayne, Oklahoma 73095

CONTACT: Mr. Denny Prince
TELEPHONE: 405-449-3391
BID DUE DATE: 04/02/2022

GENERAL DESCRIPTION:

2023 Model Year, Blue Bird VISION Conventional (Type C) School Bus, Model BBCV3310

77 Passenger Capacity – Diesel Powered

Chassis and Body manufactured by Blue Bird Body Company

SPECIFICATIONS:

AIR CONDITIONER:	126,000 Total BTU: FRT and Rear IN-wall Evaporators w/ Skirt Mounted
ALTERNATOR:	240 amp, Leece Neville, 12 volt
AXLES, SPRINGS & SHOCK ABSORBERS:	
Front axle:	12,000# rating, oil lubed bearings
Front springs:	10,000# capacity, "Softek" Parabolic tapered leaf
Rear axle:	21,000# capacity, 5.29:1 ratio, oil lubed bearings
Rear springs:	21,000# capacity, 1-Stage
Shocks absorbers:	Direct acting, front and rear
BACKUP ALARM:	112DB Safety alarm - operates while in reverse gear
BATTERIES:	Three (3), 12 volt, Group 31, 2100 cca rating, enclosed with sliding tray & locking latch
BATTERY DISCONNECT SWITCH:	Installed in Battery Box w/ Label
BODY ELECTRIC PANEL:	Exterior under driver window, with key lock
BRAKE SYSTEM:	"Meritor Quadraulic," Hydraulic System w/ Smarttrac Anti-lock (ABS) Disc type front & rear, 70MM dual system (4) pistons per caliper Dust Shields, Brakes, front and rear 9" diameter x 3" wide, internal expanding, transmission mounted w/ interlock
BUMPERS:	Front-15" x 3/16" steel, – Rear – 12" x 3/16" steel
CERTIFICATION:	Colorado Rack & Kentucky Pole Test Certified Altoona Tested
CHILD REMINDER:	Blue Bird, Sleeping Child Check System, Warning Light Activated w/ Instruction Label on FRT bulkhead
CIRCUIT PROTECTION:	Manual resetting circuit breakers on body circuits
CONSOLE:	Console mounted armrest
COWL STEPS & GRIP HANDLES:	Mounted LH & RH at windshield
DOORS:	Double Outward type with Manual Controls
Entrance:	Entrance door laminated glass, tinted 70% light transmittal 3-step step-well with black vinyl ribbed step treads Rear center mounted with upper/lower glass, tinted 30% light transmittal Retainer to hold door open Black self-skinning foam
Exit:	Entrance door equipped with key lock Rear door equipped with sliding bolt lock
Header Pad: (Entrance & Rear Exit Door):	
Vandal Locks:	
ELECTRONIC STABILITY CONTROL:	Included
EMERGENCY EQUIPMENT: Per Oklahoma Requirements	5lb Fire Extinguisher, First Aid Kit, Warning Devices, Body Fluid Cleanup Kit # Seatbelt Cutter
EMERGENCY EXITS:	
Roof Hatches:	Two (2) Advantage combination escape hatch/vents
Push-out windows:	Vertical Hinged, two (2) per side - four (4) per body

ENGINE:

Cummins Diesel, Model B6.7L, Emissions Control, EPA / CARB 2022

	Configuration/Cylinders:	In-line 6 cylinder
	Horsepower rating:	220 hp @ 2400 rpm
	Torque rating:	520 lb-ft @ 1600 rpm
ENGINE COOLING SYSTEM:		De-aeration system with tank & sight glass Charge air & down-flow radiator mounted in tandem Cummins Compeat (Blue) Antifreeze (150,000 miles, / 4000hr. service) Electric block heater, 750 watt, front bumper plug-in Electromagnetic fan drive, Pre-set high idle switch, Cruise Control
ENGINE NOISE REDUCTION:		Firewall Insulation, Driver's Area Front (2) ceiling panels (driver & 1st section), acoustic headlining
EXHAUST SYSTEM (Primary):		Diesel Particulate Filter (DPF), Selective Catalytic Reductant (SCR) & Diesel Exhaust Fluid (DEF) Diesel Exhaust Fluid (DEF) Tank w/ a capacity of 15 gal., locking access door & marked "DEF"
FLOOR COVERING:		Aluminized steel, tailpipe exits through rear bumper Heavy Duty Black Rubber with aluminum aisle trim 5/8" treated plywood subflooring over steel floor, affixed with screws
FUEL TANK:		100 gallon capacity, mounted between frame rails 90GHP, heated w/ primer pump Floor mounted inspection plate, locking fuel tank access door
GAUGES:	Primary fuel filter / water separator:	Speedometer, trip-odometer, tachometer, seven-digit odometer, clock, voltmeter Oil pressure, coolant temperature, transmission temperature, fuel gauge Extra height headroom, 77 inches (6'5") at center aisle
HEADROOM:		90,000/btu
HEATERS:	Left front heater & defroster: Right front heater & defroster: Rear under seat heater: Heater water booster pump: Dual defroster fans:	80,000/btu 12 volt, on/off switch Mounted upper center & upper left, 2-speed switch Fiberglass tilting hood & fenders
HOOD & FENDERS:		Dual electric horns and Roof Mounted Air Horn Fiberglass/mineral wool, full body insulated Name of school district on beltline
HORNS:		GVWR, Capacity & Height – Exterior Illuminated "SCHOOL BUS" Signs FRT and Rear
INSULATION:		Two (2) clear lens, 4" -rear, LED Two (2) amber lens, grommet mount -front / Two (2) red lens, grommet mount -rear, LED Three (3) amber lens, grommet mount -front / Three (3) red lens, grommet mount -rear, LED Two (2) amber lens -front, fender mounted / Two (2) amber lens, 7" -rear, LED One (1) amber lens, per side, LED
LETTERING:		Two rows, mounted above passenger seats, 15-candle power Single dome light for driver's area, separate switch Exterior Light Test w/ Switch Interior, operates with door control, incandescent Roof Mounted, White, LED , wired to Switch Two (2) red lens, 4" & Two (2) red lens, 7" -rear, LED Eight (8) light system, non-sequential, LED with hoods Rear Roof Mounted, LED , wired to separate Switch Backup Lights (LED) mounted near rear wheelhouse – LH and RH sides ROSCO, Open View (ES) Split Mirror System, 7"x10" Flat Mirror & 7"x 10" Convex Mirror Rearview exterior mirrors have black powder coated steel brackets ROSCO, Eye-Max-LP Asymmetric Shaped Mirrors Bell-Mount brackets for Cross-view Mirrors All exterior mirrors are electrically heated, Rearview (exterior) are heated & remote controlled 6"x30" flat mirror, padded edge Black rubber mud flaps, front and rear Black rubber fenders at rear wheel-housing opening National School Bus Yellow with black trim White Two (2) year discoloration & Five (5) year adhesion Side, 20-gauge, 19/34" Skirts
LIGHTS:	Backup lights: Clearance lights: Identification lights: Directional lights: Directional lights, side: Dome lights: Pre-Trip: Step-well light: Strobe Light: Stop & Tail lights: Warning lights: Strobe Light:	
MIRRORS:	Exterior rearview: Exterior cross-view: Interior rearview:	
MUD FLAPS & FENDERS:		
PAINT:	Exterior: Exterior roof: Warranty (Paint):	
PANELS:	Exterior: Interior	
POWER SOCKET:		Roof sheets, constructed of 20-gauge galvanized steel (window header to window header) Ceiling panels: 22-gauge steel, double-hemmed w/ rivet installation (No screws) 12 volt, mounted in switch panel, for cell phone, etc. AM-FM-MP3-USB-SD-MMC-BT-PA Radio with eight (8) interior speakers 3M™ reflective vinyl, yellow "SCHOOL BUS" in 8" black letters on 3M™ yellow reflective background, Front and Rear Side & rear marker strips - marker strip surrounds each emergency exit Four (4) double-ribbed, 16-gauge steel exterior body rub rails, painted black DOT approved High Back School Bus Bench Seats Grey Fire Block Upholstery National Hi-back seat w/ mechanical pedestal & RH armrest Charcoal Cloth Upholstery, Bright Orange Shoulder harness & lap belt restraint Hydraulic power, tilt & telescoping wheel, 50 degree wheel cut Illuminated LED Stop Arm, Electric 6.5"x30", Green plexi-glass, padded edge Rocker type switches w/ latching noise suppression switch
RADIO:		
REFLECTIVE TAPE:		
RUB RAILS:		
SEATS:	Passenger: Upholstery: Driver:	
STEERING:		
STOPARM:		
SUNVISOR:		
SWITCHES:		
TIRES & RIMS:	Front: Rear: Rims:	11R22.5, Goodyear Tubeless Radial, LRH, Highway tread 11R22.5, Goodyear Tubeless Radial, LRH, Highway tread 22.5 x 8.25, 10-Stud, Hub Piloted, Disc Rims
TIRE PRESURE MONITOR SYSTEM:		Doran, TPMS w/ (6) Wheel Bus includes antenna kit
TOW HOOKS:		Dual hooks, front and rear, chassis frame mounted
TRANSMISSION:		Allison Electronic Automatic, Model 2500 PTS w/SEM – TCM Programmed for Performance 5 speeds forward with overdrive - TranSynd® synthetic transmission fluid External transmission oil filter, Transmission oil cooler Underneath body fully undercoated
UNDERCOATING:		
VIDEO SURVEILLANCE SYSTEM:		Gatekeeper Digital Camera System w/ four (4) interior lens & one (1) Stop Arm Lens Gatekeeper V12 360 Degree Exterior Camera System
WINDOWS:	Side, split sash: Rear, fixed panel: Entrance Door-& Driver Window:	Tinted to allow 30% light transmittal Tinted to allow 30% light transmittal Tinted to allow 70% light transmittal Two (2) piece, shaded safety plate Electric, intermittent speed, w/washers
WINDSHIELD:		
WINDSHIELD WIPERS:		

WIRING:	Chassis:	Multiplex chassis wiring w/ LED readout on module
WHEELBASE:	Body:	Colored and continuously number coded in molding on top of side windows
WARRANTY:	Blue Bird Body & Chassis:	273" wheelbase
	Allison Transmission:	Blue Bird 5 year/100,000 mile Limited Warranty
	Cummins Diesel Engine:	Allison 7 year/unlimited miles Limited Warranty
		Cummins 5 year/100,000 mile Limited Warranty

.....
 This Blue Bird School Bus meets the State of Oklahoma and Federal School Bus requirements, **effective for date of manufacture.**

TOTAL UNIT COST, FOB: School-----**\$115,075.00, per unit**

State Bid Contract ID #: SW110
 Ross Transportation Tax ID#: 736017987
 Supplier ID#: 0000072723

- H-1.8, Type –C (72-77 Passenger) - \$94,054.00
- H.8.1.4 – Air Conditioner (Order Units)
- H.8.1.3 – “Dealer Installed Options” – Gatekeeper (3) Interior Lens & (1) Stop Arm Camera System
- H.8.1.3 – “Dealer Installed Options” – Tire Pressure Monitor (6) Wheel
- H.8.1.3 – “Dealer Installed Options” – Gatekeeper V12 360 Degree Exterior Camera System
- H.8.1.3 – “Dealer Installed Options” – First Light Illuminated “SCHOOL BUS” signs & Stop Arm
- H.8.1.3 – “Dealer Installed Options” – Battery Disconnect – Battery Box Located

DELIVERY TIME: ----- **180 - 210 Days Upon PO**

Ryan Ross _____
 ROSS TRANSPORTATION, inc.

 BID ACCEPTED BY SCHOOL DISTRICT OFFICIAL

04/02/2022 _____
 Date of Bid

 Date of Acceptance



2500 South Meridian • Oklahoma City, OK 73108-1744
 Office: 405-681-6691 • Toll Free: 800-965-7677 • Fax: 405-681-6693

DISTRIBUTORS OF **BLUE BIRD** SCHOOL BUSES

Corporate Office

Ryan Ross, General Manager

Oklahoma Bus Sales

Todd Miller, Sales Representative

BID TO: Mid-America Tech. Center
ADDRESS: PO Box H
CITY/STATE/ZIP: Wayne, Oklahoma 73095

CONTACT: Mr. Denny Prince
TELEPHONE: 405-449-3391
BID DUE DATE: 04/02/2022

GENERAL DESCRIPTION:

2023 Model Year, Blue Bird VISION Conventional (Type C) School Bus, Model BBCV3310

69 Passenger Capacity – LIFT EQUIPPED Diesel Powered

Chassis and Body manufactured by Blue Bird Body Company

SPECIFICATIONS:

AIR CONDITIONER:	126,000 Total BTU: FRT and Rear IN-wall Evaporators w/ Skirt Mounted
ALTERNATOR:	240 amp, Leece Neville, 12 volt
AXLES, SPRINGS & SHOCK ABSORBERS:	
Front axle:	12,000# rating, oil lubed bearings
Front springs:	10,000# capacity, "Softek" Parabolic tapered leaf
Rear axle:	21,000# capacity, 5.29:1 ratio, oil lubed bearings
Rear AIR:	21,000# capacity, Hendrickson Air Ride Rear Suspension w/ AD-IP Air Dryer and DV-2 Automatic Drain Valve - Heated
Shocks absorbers:	Direct acting, front and rear
BACKUP ALARM:	112DB Safety alarm - operates while in reverse gear
BATTERIES:	Three (3), 12 volt, Group 31, 2100 cca rating, enclosed with sliding tray & locking latch
BATTERY DISCONNECT SWITCH:	Installed in Battery Box w/ Label
BODY ELECTRIC PANEL:	Exterior under driver window, with key lock
BRAKE SYSTEM:	"Meritor Quadraulic," Hydraulic System w/ Smarttrac Anti-lock (ABS) Disc type front & rear, 70MM dual system (4) pistons per caliper Dust Shields, Brakes, front and rear 9" diameter x 3" wide, internal expanding, transmission mounted w/ interlock
BUMPERS:	Front-15" x 3/16" steel, - Rear - 12" x 3/16" steel
CERTIFICATION:	Colorado Rack & Kentucky Pole Test Certified Altoona Tested
CHILD REMINDER:	Blue Bird, Sleeping Child Check System, Warning Light Activated w/ Instruction Label on FRT bulkhead
CIRCUIT PROTECTION:	Manual resetting circuit breakers on body circuits
CONSOLE:	Console mounted armrest
COWL STEPS & GRIP HANDLES:	Mounted LH & RH at windshield
DOORS:	Double Outward type with Manual Controls
Entrance:	Entrance door laminated glass, tinted 70% light transmittal 3-step step-well with black vinyl ribbed step treads Rear center mounted with upper/lower glass, tinted 30% light transmittal Retainer to hold door open Black self-skinning foam
Exit:	Entrance door equipped with key lock Rear door equipped with sliding bolt lock
Header Pad: (Entrance & Rear Exit Door):	
Vandal Locks:	
ELECTRONIC STABILITY CONTROL:	Included
EMERGENCY EQUIPMENT:	Per Oklahoma Requirements
EMERGENCY EXITS:	5lb Fire Extinguisher, First Aid Kit, Warning Devices, Body Fluid Cleanup Kit # Seatbelt Cutter
Roof Hatches:	Two (2) Advantage combination escape hatch/vents
Push-out windows:	Vertical Hinged, two (2) per side - four (4) per body

ENGINE:

Cummins Diesel, Model B6.7L, Emissions Control EPA / CARB 2022

Configuration/Cylinders:
Horsepower rating:
Torque rating:

In-line 6 cylinder
220 hp @ 2400 rpm
520 lb-ft @ 1600 rpm

ENGINE COOLING SYSTEM:

De-aeration system with tank & sight glass
Charge air & down-flow radiator mounted in tandem
Cummins Compeat (Blue) Antifreeze (150,000 miles, / 4000hr. service)
Electric block heater, 750 watt, front bumper plug-in
Electromagnetic fan drive, Pre-set high idle switch, Cruise Control

ENGINE NOISE REDUCTION:

Firewall Insulation, Driver's Area
Front (2) ceiling panels (driver & 1st section), acoustic headlining

EXHAUST SYSTEM (Primary):

Diesel Particulate Filter (DPF), Selective Catalytic Reductant (SCR) & Diesel Exhaust Fluid (DEF)
Diesel Exhaust Fluid (DEF) Tank w/ a capacity of 15 gal., locking access door & marked "DEF"

FLOOR COVERING:

Aluminized steel, tailpipe exits through rear bumper
Heavy Duty Black Rubber with aluminum aisle trim
5/8" treated plywood subflooring over steel floor, affixed with screws

FUEL TANK:

Primary fuel filter / water separator:

100 gallon capacity, mounted between frame rails

GAUGES:

90GHP, heated w/ primer pump
Floor mounted inspection plate, locking fuel tank access door
Speedometer, trip-odometer, tachometer, seven-digit odometer, clock, voltmeter
Oil pressure, coolant temperature, transmission temperature, fuel gauge

HEADROOM:

Extra height headroom, 77 inches (6'5") at center aisle

HEATERS:

Left front heater & defroster:
Right front heater & defroster:
Rear Wall (RH) heater:
Heater water booster pump:
Dual defroster fans:

90,000/btu
50,000/btu
80,000/btu

HOOD & FENDERS:

12 volt, on/off switch
Mounted upper center & upper left, 2-speed switch

HORNS:

Fiberglass tilting hood & fenders
Dual electric horns and **Roof Mounted Air Horn**

INSULATION:

Fiberglass/mineral wool, full body insulated

LETTERING:

Name of school district on beltline
GVWR, Capacity & Height - Exterior

Illuminated "SCHOOL BUS" Signs FRT and Rear

LIFT EQUIPMENT:

47" lift door mounted right rear, with exterior rub rails

Wheelchair Lift: Braun NL919FIB-2 (1000lb capacity)

Rear most Four (4) seats on LH side & last two (2) seats on RH side are Track Mounted for up to Three (3) Wheelchair Positions – *Please Review Seat-plan listed below*


Three (3) wheelchair position in rear of bus

Three (3) sets: Q Straint, QRT Max, retractable tiedowns

Lift interlock system

Full Floor Track on both sides of bus (four tracks per side) with track above windows

SP: 30927 BBCV 3310, 69 CAP

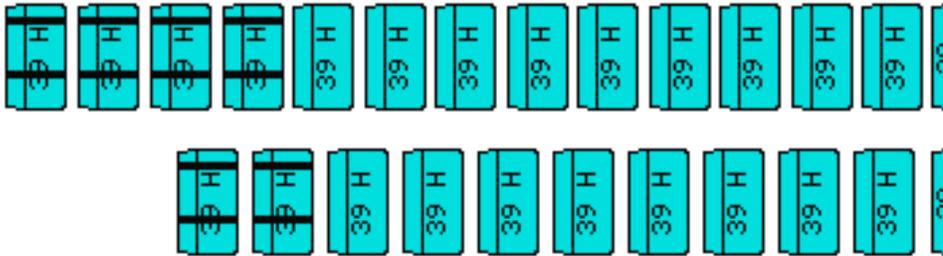

LIGHTS:

Backup lights:
Clearance lights:
Identification lights:
Directional lights:
Directional lights, side:
Dome lights:

Two (2) clear lens, 4" -rear, **LED**
Two (2) amber lens, grommet mount -front / Two (2) red lens, grommet mount -rear, **LED**
Three (3) amber lens, grommet mount -front / Three (3) red lens, grommet mount -rear, **LED**
Two (2) amber lens -front, fender mounted / Two (2) amber lens, 7" -rear, **LED**
One (1) amber lens, per side, **LED**
Two rows, mounted above passenger seats, 15-candle power
Single dome light for driver's area, separate switch

Pre-Trip:

Step-well light:
Strobe Light:
Stop & Tail lights:
Warning lights:
Strobe Light:

Exterior Light Test w/ Switch
Interior, operates with door control, incandescent
Roof Mounted, White, **LED**, wired to Switch
Two (2) red lens, 4" & Two (2) red lens, 7" -rear, **LED**
Eight (8) light system, non-sequential, LED with hoods
Rear Roof Mounted, LED, wired to separate Switch

MIRRORS:

Exterior rearview:
Exterior cross-view:

Backup Lights (LED) mounted near rear wheelhouse – LH and RH sides
ROSCO, Open View (ES) Split Mirror System, 7"x10" Flat Mirror & 7"x 10" Convex Mirror
Rearview exterior mirrors have black powder coated steel brackets
ROSCO, Eye-Max-LP Asymmetric Shaped Mirrors
Bell-Mount brackets for Cross-view Mirrors

All exterior mirrors are electrically heated, Rearview (exterior) are heated & remote controlled

MUD FLAPS & FENDERS:

Interior rearview:

6"x30" flat mirror, padded edge
Black rubber mud flaps, front and rear
Black rubber fenders at rear wheel-housing opening
National School Bus Yellow with black trim

PAINT:

Exterior:
Exterior roof:
Warranty (Paint):

Two (2) year discoloration & Five (5) year adhesion

PANELS:

Interior

Side, 20-gauge, 19/34" Skirts
Roof sheets, constructed of 20-gauge galvanized steel (window header to window header)
Ceiling panels: 22-gauge steel, double-hemmed w/ rivet installation (No screws)

POWER SOCKET:

12 volt, mounted in switch panel, for cell phone, etc.

RADIO:

AM-FM-MP3-USB-SD-MMC-BT-PA Radio with eight (8) interior speakers

REFLECTIVE TAPE:

3M™ reflective vinyl, yellow
"SCHOOL BUS" in 8" black letters on 3M™ yellow reflective background, Front and Rear

RUB RAILS:		Side & rear marker strips - marker strip surrounds each emergency exit
SEATS:	Passenger:	Four (4) double-ribbed, 16-gauge steel exterior body rub rails, painted black
	Upholstery:	DOT approved High Back School Bus Bench Seats
	Driver:	Grey Fire Block Upholstery
STEERING:		National Hi-back seat w/ Air pedestal & RH armrest
STOPARM:		Charcoal Cloth Upholstery, Bright Orange Shoulder harness & lap belt restraint
SUNVISOR:		Hydraulic power, tilt & telescoping wheel, 50 degree wheel cut
SWITCHES:		Illuminated LED Stop Arm, Electric
TIRES & RIMS:	Front:	6.5"X30", Green plexi-glass, padded edge
	Rear:	Rocker type switches w/ latching noise suppression switch
	Rims:	11R22.5, Goodyear Tubeless Radial, LRH, Highway tread
		11R22.5, Goodyear Tubeless Radial, LRH, Highway tread
		22.5 x 8.25, 10-Stud, Hub Piloted, Disc Rims
TIRE PRESURE MONITOR SYSTEM:		Doran, TPMS w/ (6) Wheel Bus includes antenna kit
TOW HOOKS:		Dual hooks, front and rear, chassis frame mounted
TRANSMISSION:		Allison Electronic Automatic, Model 2500 PTS w/SEM – TCM Programmed for Performance
		5 speeds forward with overdrive - TranSynd® synthetic transmission fluid
		External transmission oil filter, Transmission oil cooler
UNDERCOATING:		Underneath body fully undercoated
VIDEO SURVEILLANCE SYSTEM:		Gatekeeper Digital Camera System w/ four (4) interior lens & one (1) Stop Arm Lens
		Gatekeeper V12 360 Degree Exterior Camera System
WINDOWS:	Side, split sash:	Tinted to allow 30% light transmittal
	Rear, fixed panel:	Tinted to allow 30% light transmittal
	Entrance Door-& Driver Window:	Tinted to allow 70% light transmittal
WINDSHIELD:		Two (2) piece, shaded safety plate
WINDSHIELD WIPERS:		Electric, intermittent speed, w/washers
WIRING:	Chassis:	Multiplex chassis wiring w/ LED readout on module
	Body:	Colored and continuously number coded in molding on top of side windows
WHEELBASE:		273" wheelbase
WARRANTY:	Blue Bird Body & Chassis:	Blue Bird 5 year/100,000 mile Limited Warranty
	Allison Transmission:	Allison 7 year/unlimited miles Limited Warranty
	Cummins Diesel Engine:	Cummins 5 year/100,000 mile Limited Warranty

.....
 This Blue Bird School Bus meets the State of Oklahoma and Federal School Bus requirements, **effective for date of manufacture.**

TOTAL UNIT COST, FOB: School----- **\$126,168.00, per unit**

State Bid Contract ID #: SW110
 Ross Transportation Tax ID#: 736017987
 Supplier ID#: 0000072723

- A.3.13, Type –C (72-77 Passenger) - \$117,381.00
- H.8.1.2 – “Body Options” – Air Driver’s and Air Entrance Door
- H.8.1.3 – “Dealer Installed Options” – Gatekeeper (3) Interior Lens & (1) Stop Arm Camera System
- H.8.1.3 – “Dealer Installed Options” – Tire Pressure Monitor (6) Wheel
- H.8.1.3 – “Dealer Installed Options” – Gatekeeper V12 360 Degree Exterior Camera System
- H.8.1.3 – “Dealer Installed Options” – First Light Illuminated “SCHOOL BUS” signs & Stop Arm
- H.8.1.3 – “Dealer Installed Options” – Battery Disconnect – Battery Box Located

DELIVERY TIME: ----- **180 - 210 Days Upon PO**

Ryan Ross _____
 ROSS TRANSPORTATION, inc.

 04/02/2022 _____
 Date of Bid

 BID ACCEPTED BY SCHOOL DISTRICT OFFICIAL

 Date of Acceptance