



SPM SERVICES

# PROPOSAL

<b>TO:</b> Mid-America Technology Center	<b>COMPANY:</b> SPM Services, LLC
<b>Date:</b> October 4, 2022	<b>NAME:</b> Alex Pinon
<b>PROJECT NAME:</b> Concrete Repairs (See Exhibit 1 for reference)	<b>ADDRESS:</b> PO Box 904, Mustang, OK 73064
<b>DESCRIPTION:</b> Concrete repairs	<b>PHONE:</b> 405-501-1085
	<b>EMAIL:</b> alex_pinon@icloud.com

We propose to furnish all labor, material, tools, equipment, & supervision necessary to perform the work described below.

**SCOPE OF WORK – Concrete repairs of two area (Area 1 - approximately 23ft x 52ft / Area 2 – approximately 25ft x 32ft)**

- Break and remove concrete from shown on exhibit 1. And dispose to appropriate landfill.
- Plate compact existing underlayment.
- Install #3 (3/8") rebar at 24" o.c. at all repair areas and dowel to existing drives and slabs.
- Install 3500 PSI Concrete.
- Medium broom finish to match existing.
- Mechanically cut relief joints as needed.
- Install six parking bumpers at new parking spot in area 1
- Strip all form when concrete gain sufficient strength.
- Clean are from debris generated by SPM and haul away.

**Total Area 1 = \$10,950.00**

**Total Area 2 = \$7,300.00**

**To cut concrete and add two ADA compliant ramps to existing sidewalk add and additional = \$2,750.00**

**\*If you choose to repair both areas at the same time a \$500 discount to total invoice\***

*Total \$21,000*



**EXCLUSIONS:**

<ul style="list-style-type: none"> <li>• Mechanical</li> <li>• Electrical</li> <li>• Plumbing</li> </ul>	<ul style="list-style-type: none"> <li>• Stripping</li> </ul>	<ul style="list-style-type: none"> <li>•</li> </ul>
--	---	---

- *Quote is good for 30 days.*

We look forward to working with you. Feel free to call if you have any questions.  
Sincerely; *Alex Pinon, Manager.*

**EXHIBIT 1**

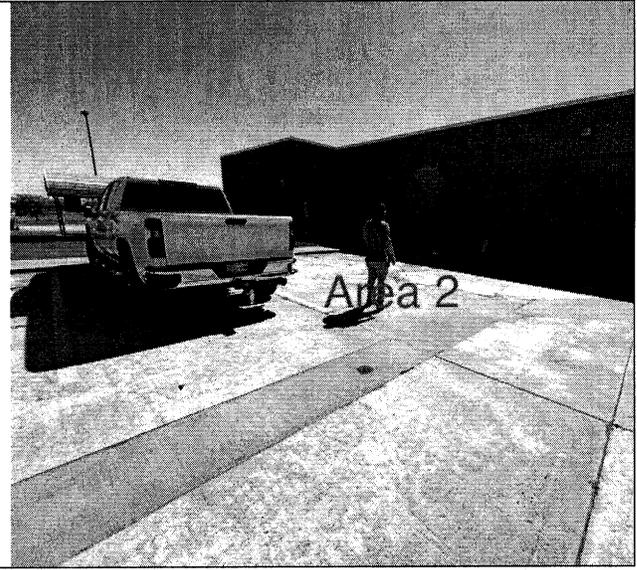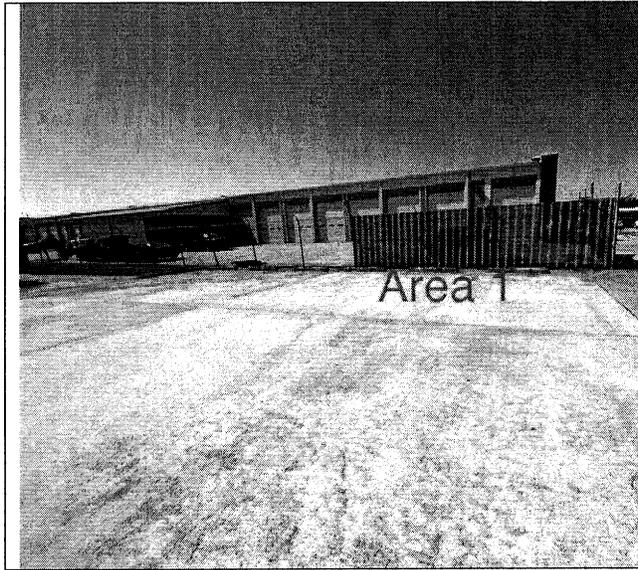

**Mid-America Tech.**

Concrete Repairs  
Area 1 - 23ft x 52ft  
Area 2 - 25ft x 32ft

